PARTS LIST FOR SANSUI SPEAKER SYSTEM

Ref No. USP-3

SP-X9/X8/X7/X6

SANSUI ELECTRIC CO., LTD.
14-1, Izumi 2-Chome, Suginami-ku, TOKYO 168 JAPAN
TELEPHONE: (03) 323-1111/TELEX. 232-2076

SP-X9

1. SPECIFICATIONS

* Design and specifications subject to changes without notice for improvements.

1-1. SP-X9

Speakers	
Woofer	436 mm (17-5/32") Cone-type
Midrange	165 mm (6-1/2") Cone-type
Tweeter	154 x 50 mm (6-1/16" x 2") x 2 Horn-type
Super tweeter	49 mm (1-15/16") x 3 Cone-type
Maximum input power	300 watts
Impedance	8 ohms
Sensitivity	100 dB/W (at 1 m)
Frequency range	45 to 23,000 Hz (in anechoic chamber) 22 to 23,000 Hz (in normal listening room)
Crossover frequencies	1,000 Hz, 7,000 Hz, 10,000 Hz, 15,000 Hz
Enclosure	Bass reflex type Walnut grain vinyl finish
Dimensions	470 mm (18-1/2") W 688 mm (27-1/16") H 253 mm (9-31/32") D
Weight	18.8 kg (41.4 lbs) net 20.8 kg (45.9 lbs) packed

1-2. SP-X8

Speakers	
Woofer	436 mm (17-5/32") Cone-type
Midrange	165 mm (6-1/2") Cone-type
Tweeter	154 x 50 mm (6-1/16" x 2") Horn-type
Super tweeter	49 mm (1-15/16") x 3 Cone-type
Maximum input power	250 watts
Impedance	8 ohms
Sensitivity	100 dB/W (at 1 m)
Frequency range	45 to 23,000 Hz (in anechoic chamber) 22 to 23,000 Hz (in normal listening room)
Crossover frequencies	1,000 Hz, 6,000 Hz, 10,000 Hz
Enclosure	Bass reflex type Walnut grain vinyl finish
Dimensions	470 mm (18-1/2") W 688 mm (27-1/16") H 253 mm (9-31/32") D
Weight	18.3 kg (40.3 lbs) net 20.3 kg (44.8 lbs) packed

1-3. SP-X7

Speakers	
Woofer	406 mm (16") Cone-type
Midrange	121 mm (4-3/4") Cone-type
Tweeter	154 x 50 mm (6-1/16" x 2") Horn-type
Super tweeter	49 mm (1-15/16") x 2 Cone-type
Maximum input power	200 watts
Impedance	8 ohms
Sensitivity	97 dB/W (at 1 m)
Frequency range	50 to 22,000 Hz (in anechoic chamber) 30 to 22,000 Hz (in normal listening room)
Crossover frequencies	2,500 Hz, 7,000 Hz, 15,000 Hz
Enclosure	Bass reflex type Walnut grain vinyl finish
Dimensions	436 mm (17-5/32") W 682 mm (26-27/32") H 252 mm (9-29/32") D
Weight	15.9 kg (35.1 lbs) net 17.2 kg (37.9 lbs) packed

1-4. SP-X6

Speakers	
Woofer	330 mm (13") Cone-type
Midrange	121 mm (4-3/4") Cone-type
Tweeter	154 x 50 mm (6-1/16" x 2") Horn-type
Super tweeter	49 mm (1-15/16") Cone-type
Maximum input power	160 watts
Impedance	8 ohms
Sensitivity	95 dB/W (at 1 m)
Frequency range	50 to 22,000 Hz (in anechoic chamber) 30 to 22,000 Hz (in normal listening room)
Crossover frequencies	2,500 Hz, 8,000 Hz, 16,000 Hz
Enclosure	Bass reflex type Walnut grain vinyl finish
Dimensions	378 mm (14-7/8") W 629 mm (24-3/4") H 252 mm (9-29/32") D
Weight	12.1 kg (26.7 lbs) net 13.4 kg (29.5 lbs) packed

2. SP-X9

2-1. Front View

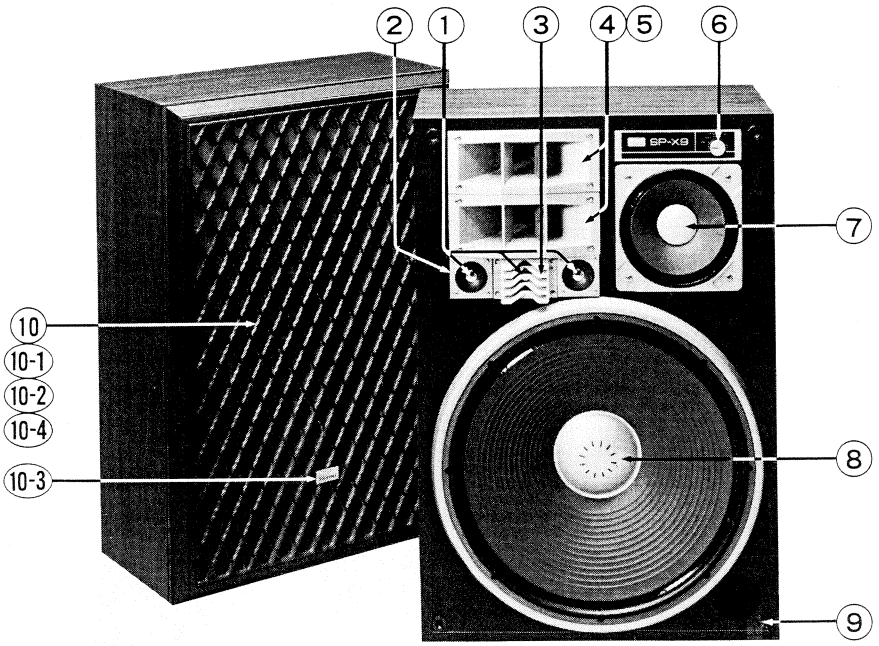

Parts List (Front View)

Parts No.	Stock No.	Description
1	44308300	T-167 Supertweeter
2	14059201	Supertweeter Cover
3	14059901	Acoustic Lens
4	14133000	T-149E Tweeter
5	14060400	Horn Cover
6	14136000	Knob Attenuator
7	14141600	S-158 Midrange
8	14141500	W-218 Woofer
9	52944900	Latch
10	14132600	Front Grille Ass'y
10-1	52942200	Strike
10-2	52940600	Support
10-3	14059110	Sansui Badge
	51740300	Push-nut for the Badge
10-4	00485900	Frat Countersunk Head Wood Screw M2.7 x 13 Black

Parts List (Crossover Network)

Parts No.	Stock No.	Description
C1	00302000	15μF 50WV E.B.
C2	00301100	2.2μF 50WV E.B.
C3	00301100	2.2μF 50WV E.B.
C4	00346200	0.33μF 50WV F.C.
C5	00344300	0.1μF 50WV F.C.
	14028900	Attenuator
	22301600	2P Input Terminal
	14082200	Binding Head Tapping Screw M3 x 16 Black

E.B.: Bi-Polar Electrolytic Capacitor
F.C.: Film Capacitor

2-2. Crossover Network

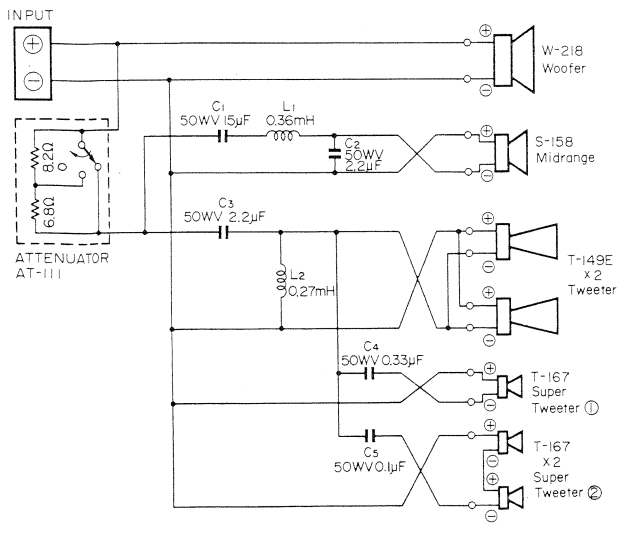

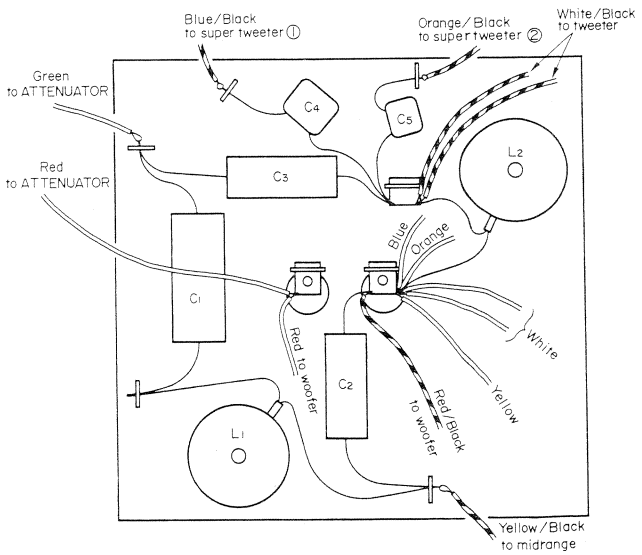

3. SP-X8

3-1. Front View

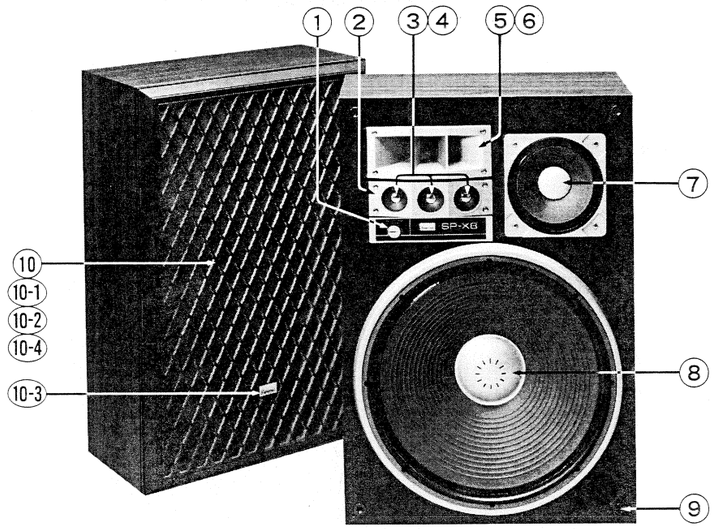

Parts List (Front View)

Parts No.	Stock No.	Description
1	14136000	Knob Attenuator
2	14141100	Supertweeter Baffle
3	44308300	T-167 Supertweeter
4	51740300	Push-nut
5	14133000	T-149E Tweeter
6	14060400	Horn Cover
7	14141600	S-158 Midrange
8	14141500	W-218 Woofer
9	52944900	Latch
10	14132700	Front Grille Ass'y
10-1	52942200	Strike
10-2	52940600	Support
10-3	14059110	Sansui Badge
	51740300	Push-nut for the Badge
10-4	00485900	Flat countersunk Head Wood Screw M2.7 x 13 Black

Parts List (Crossover Network)

Parts No.	Stock No.	Description
C1	00302000	15μF 50WV E.B.
C2	00301100	2.2μF 50WV E.B.
C3	00346200	0.33μF 50WV F.C.
	14028900	Attenuator
	22301600	2P Input Terminal
	14082200	Binding Head Tapping Screw M3 x 16 Black

E.B.: Bi-Polar Electrolytic Capacitor
F.C.: Film Capacitor

3-2. Crossover Network

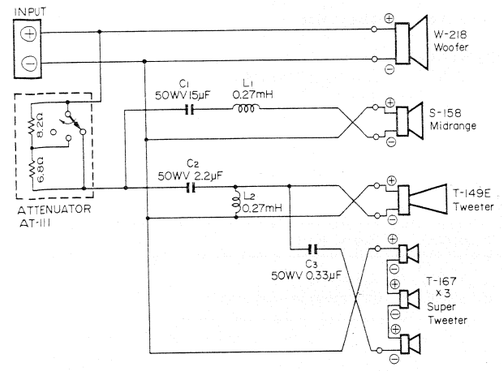

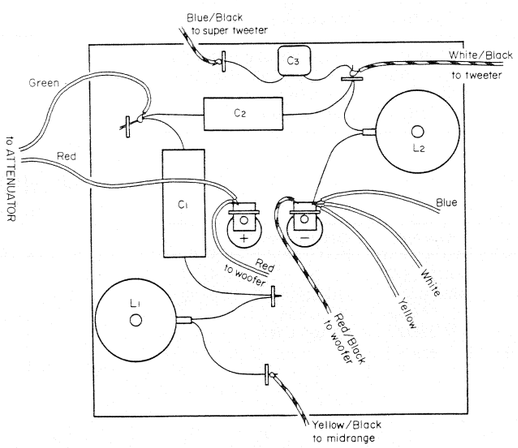

4. SP-X7

4-1. Front View

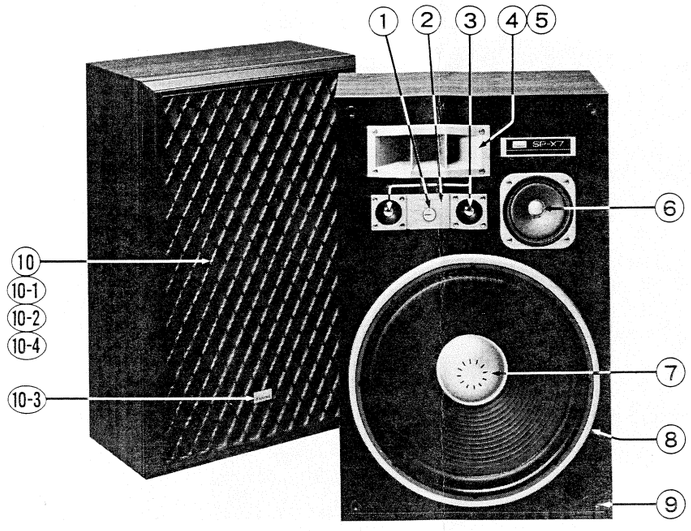

Parts List (Front View)

Parts No.	Stock No.	Description
1	14136000	Knob
2	14137500	Control-Base
3	44308300	T-167 Super Tweeter
4	14133000	T-149E Tweeter
5	14060400	Horn Cover
6	14133100	S-147D Midrange
7	14133200	W-192C Woofer
8	14059700	Woofer Dress Ring
9	52944900	Latch
10	14132800	Front Grille Ass'y
10-1	52942200	Strike
10-2	52940600	Support
10-3	14059110	Sansui Badge
	51740300	Push-nut for the Badge
10-4	00485900	Frat Countersunk Head Wood Screw M2.7 x 13 Black

Parts List (Crossover Network)

Parts No.	Stock No.	Description
C1	00301700	8.2μF 50V E.B.
C2	00301100	2.2μF 50V E.B.
C3	00346200	0.33μF 50V F.C.
R1	00067300	8.2Ω 10W Ce.R.
R2	00066300	4.7Ω 10W Ce.R.
	14088000	Rotary Switch
	22103900	2P Input Terminal
	14076400	Binding Head Tapping Screw M3 x 12 Black

E.B.: Bi-polar Electrolytic Capacitor
F.C.: Film Capacitor
Ce.R: Cement Resistor

4-2. Crossover Network

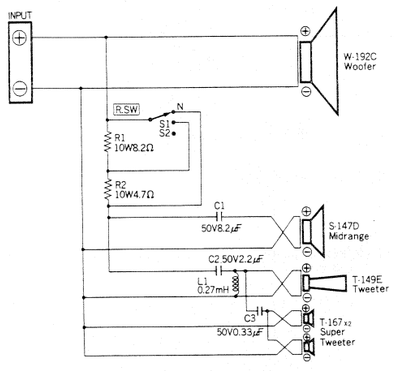

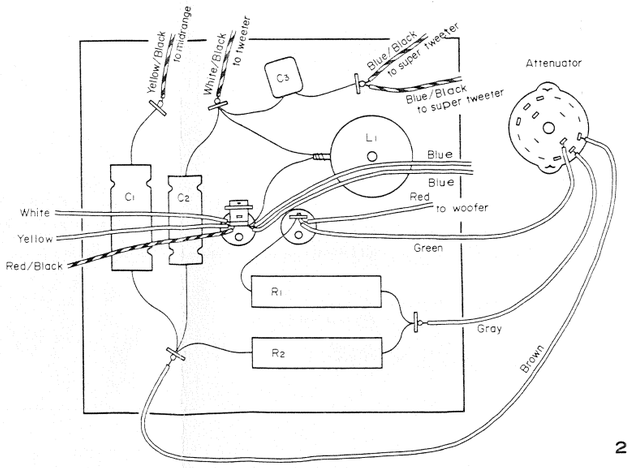

5. SP-X6

5-1. Front View

Parts List (Front View)

Parts No.	Stock No.	Description
1	14059501	Control-Base
2	14136000	Knob
3	14133000	T-149E Tweeter
4	14060400	Horn Cover
5	44308300	T-167 Super Tweeter
6	14059201	Supertweeter Cover
7	14133100	S-147D Midrange
8	14138600	W-191F Woofer
9	14059800	Woofer Dress Ring
10	52944900	Latch
11	14132900	Front Grille Ass'y
11-1	52942200	Strike
11-2	52940600	Support
11-3	14059110	Sansui Badge
	51740300	Push-nut for the Badge
11-4	00485900	Frat Countersunk Head Wood Screw M2.7 x 13 Black

Parts List (Crossover Network)

Parts No.	Stock No.	Description
C1	00301700	8.2μF 50V E.B.
C2	00300900	1μF 50V E.B.
C3	00346700	0.047μF 50V F.C.
R1	00082400	8.2Ω 5W Ce.R.
R2	00081400	4.7Ω 5W Ce.R.
	14088000	Rotary Switch
	22103900	2P Input Terminal
	14076400	Binding Head Tapping Screw M3 x 12 Black

E.B.: Bi-polar Electrolytic Capacitor
F.C.: Film Capacitor
Ce.R: Cement Resistor

5-2. Crossover Network

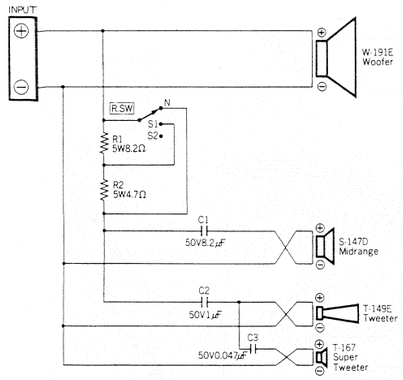

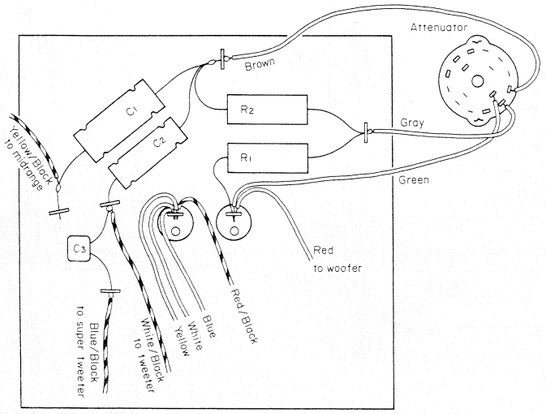

6. PACKING LIST

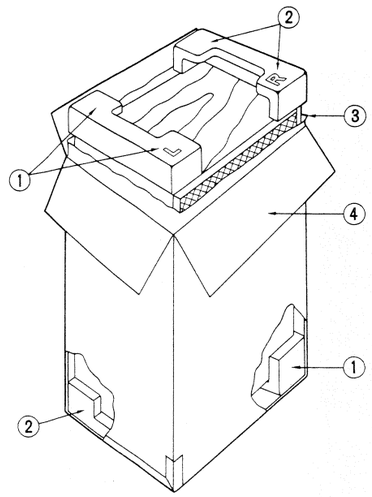

6-1. SP-X9

Packing List

Parts No.	Stock No.	Description
1	14078600	(L) Styrofoam Packing
2	14078500	(R) Styrofoam Packing
3	91150810	Vinyl Bag
4	14136700	Carton Case

6-2. SP-X8

Packing List

Parts No.	Stock No.	Description
1	14078600	(L) Styrofoam Packing
2	14078500	(R) Styrofoam Packing
3	91150810	Vinyl Bag
4	14136800	Carton Case

6-3. SP-X7

Packing List

Parts No.	Stock No.	Description
1	14078600	(L) Styrofoam Packing
2	14078500	(R) Styrofoam Packing
3	91150900	Vinyl Bag
4	14136600	Carton Case

6-4. SP-X6

Packing List

Parts No.	Stock No.	Description
1	14078600	(L) Styrofoam Packing
2	14078500	(R) Styrofoam Packing
3	91151100	Vinyl Bag
4	14136500	Carton Case

7. ACCESSORY LIST

7-1. SP-X9

Accessory List

Stock No.	Description
38341400	Speaker Cord
46125400	Operating Instruction

7-2. SP-X8

Accessory List

Stock No.	Description
38341400	Speaker Cord
46125500	Operating Instruction

7-3. SP-X7

Accessory List

Stock No.	Description
38341400	Speaker Cord
46125600	Operating Instruction

7-4. SP-X6

Accessory List

Stock No.	Description
38341400	Speaker Cord
46125700	Operating Instruction

Printed in Japan (610830M)〈Stock No.36460300〉